

TOA-L2500ZMRL-W3.5

Light Bar Display LED

Part Number	Chip		Face Color	Segment Color
	Material	Source Color		
TOA-L2500ZMRL-W3.5	AlGaInP	Ultra-red	White	White


Features

- Universal
- I.C. compatible
- Low power requirement
- RoHS compliant

Applications

- Audio equipment
- Instrument panels
- Digital read out display

Package Dimensions & Internal Circuit Diagram

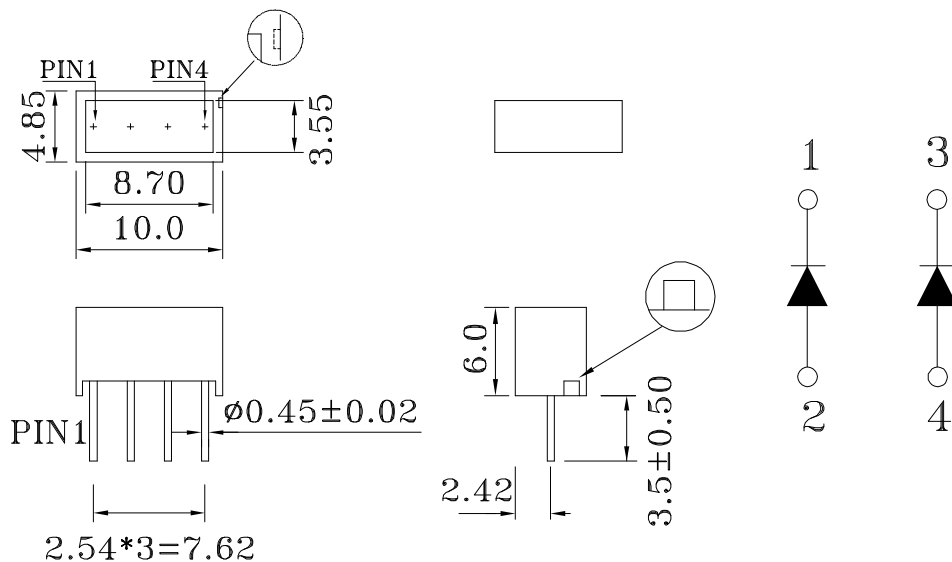

Notes:

1. All dimensions are in millimeters, tolerance: ± 0.25 ; Angle: $\pm 3^\circ$ unless otherwise noted.
2. Specifications are subject to change without notice.

Absolute Maximum Rating @ Ta=25°C

Parameter	Maximum Rating	Unit
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	80	mA
Power Dissipation	75	mW
Continuous Forward Current	20	mA
Recommend Operating Current	12	mA
Reverse Voltage	5	V
Operating Temperature Range	-25°C to +85°C	
Storage Temperature Range	-30°C to +85°C	
Lead-Free Solder Temperature(1/16 Inch Below Seating Plane)	260°C for 5 Sec	

Electrical / Optical Characteristic @ Ta=25°C

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	I _v		32907		ucd	I _F =10mA
Dominant Wavelength	λ _d		640		nm	I _F =20mA
Spectral Line Half-Width	Δλ		15		nm	I _F =20mA
Forward Voltage	V _F	1.8	2.0	2.3	V	I _F =20mA
Reverse Current	I _R			10	μA	V _R =5V
Luminous Intensity Matching Rate	I _v -m			2.0:1		I _F =20mA

Displays need to be stored in an environment below 30 degree and below 60% humidity.

The lifetime of the displays is 1 year